

500L JOJO BACKWASH TANK

INNOVATIVE DESIGN THAT ALLOWS FOR POOL BACKWASH WATER TO BE SAVED AND RE-USED

FEATURES INCLUDE:

- Made from transparent UV resistant polymer so that water quality is visible.
- Purpose located tap off points are provided to ensure only clean water is returned to your pool and dirty water can be used in your garden.
- Lightweight and durable for both mobile and permanent application.



TANK DIMENSIONS

LITRE
500L

TANK HEIGHT
1 080mm

DIAMETER
840mm

WEIGHT (WHEN EMPTY)
13kg

LID
480mm Clip-on Lid with E-clips

THE BACKWASH TANK INCLUDES:


- Inlet - 40mm Female Fitting
- Overflow - 40mm Female Fitting
- Outlet - 40mm Water Fitting
- 20mm Fitting & 20mm Tommy Tap
- 20mm Tap Connector
- 25mm Ball Valve, 40/25mm Reducer & 25mm Barrel Nipple (Fitted as one assembly)
- 20mm Accessory Adaptor

ADDITIONAL COMPONENTS REQUIRED


- Standard garden hose to move water from tank back to pool and to garden.
- A 40mm layflat hose is recommended to transfer water from pool filter back wash to the tank.



INSTALLATION / ASSEMBLY

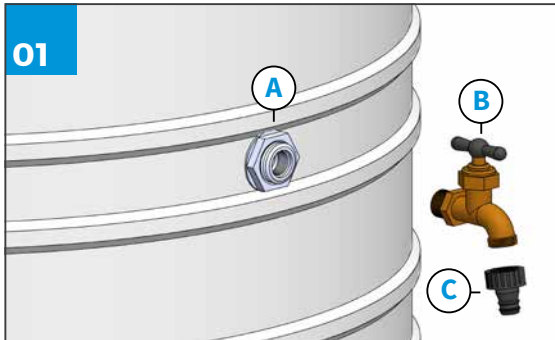


Fit Tommy tap (B) to 20mm water fitting (A) on the tank and 20mm tap connector (C) to the tap.
NOTE: Tap is used to return clear water to the pool.

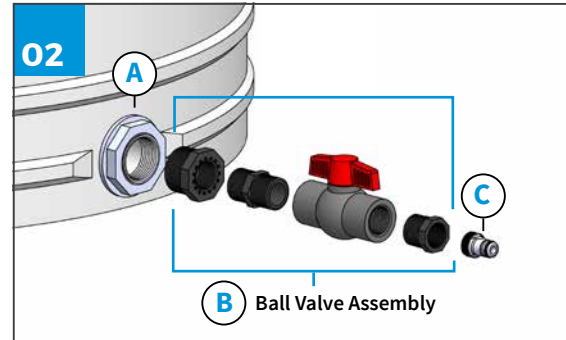


Fit ball valve assembly (B) to 40mm inlet (A) at the bottom of the tank, then fit the accessory adaptor (C) to the ball valve assembly. **NOTE: The ball valve will be used to return settled pool waste to the garden.**


APPLICATION

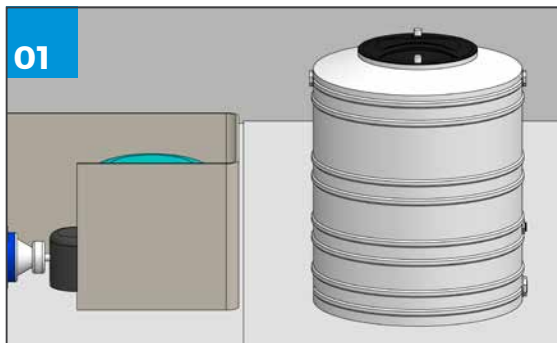


Place tank in the desired location relative to filter and pool. Ensure that it is placed on a base that is sound, level, smooth, free from any protrusions and at least 100mm wider than the base of the tank.

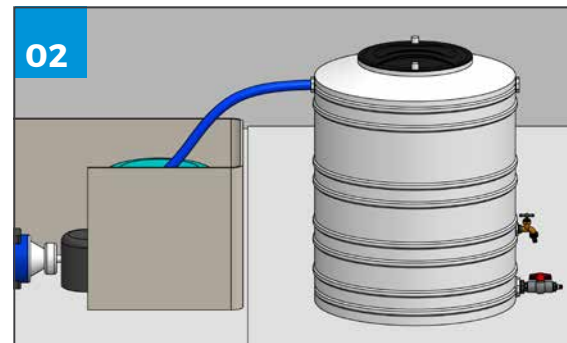

a) Connect a 40mm layflat hose from your pool backwash line to your overflow/inlet at the top of the tank.
b) Backwash your pool and fill the tank with your backwash water. Allow the water to settle.

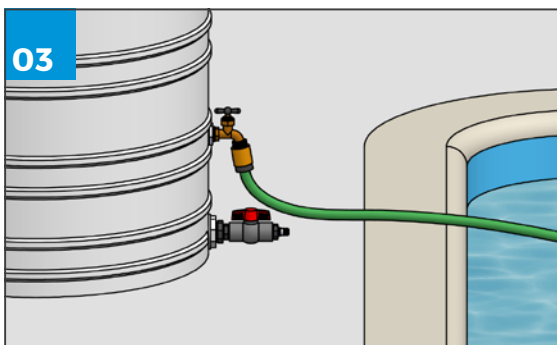

Connect a hose to the 20mm tap connector and return the clear water to the pool.

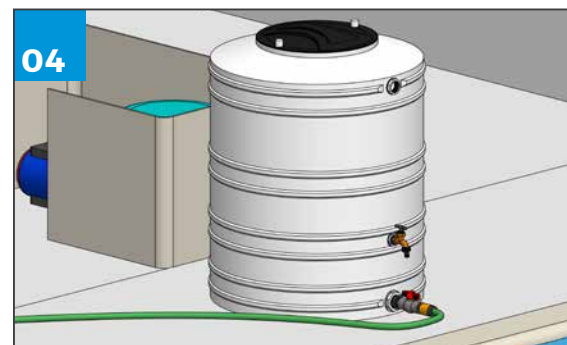

When this is complete, connect a hose to the accessory adaptor on the ball valve assembly and divert the dirty water into the desired area in your garden.